


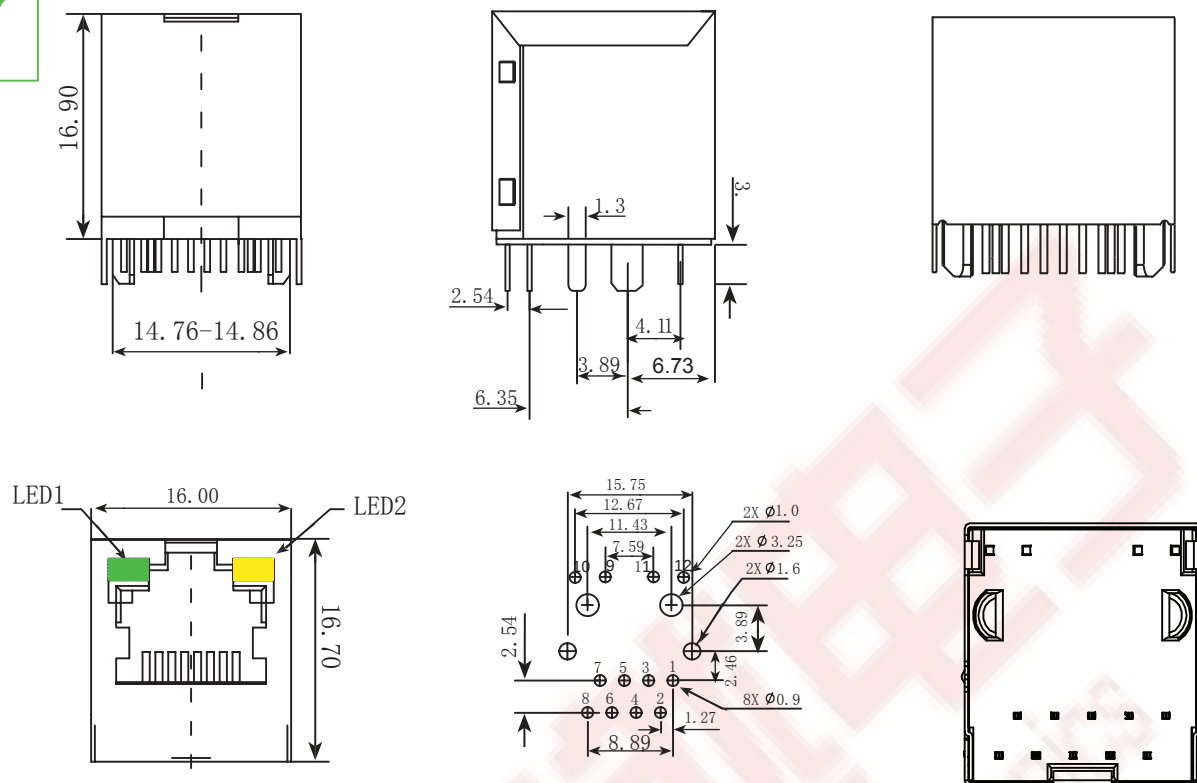

Suggested PCB Layout

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

Insertion Loss: 1-100MHZ -1.0dB MAX

Return Loss: 1-30MHZ -16.0dB MIN
30-60MHZ -14.0dB MIN
60-80MHZ -10.0dB MIN

Cross Talk: 1-30MHZ -40.0dB MIN
30-60MHZ -35.0dB MIN
60-80MHZ -30.0dB MIN

CMR: 1-100MHZ -35.0dB MIN

Hi-Pot: 1500v AC 6S 1mA


Turn Ratio: 1CT:1CT+/-3%

OCL:350uH MIN @ 100KHZ 100mV 8mA DC

Contacts: 0.35mm thick phos bronze plated with 6u' gold in contact are

Housing Material: PBT Black

Operating temperature range: -40°C to +85°C

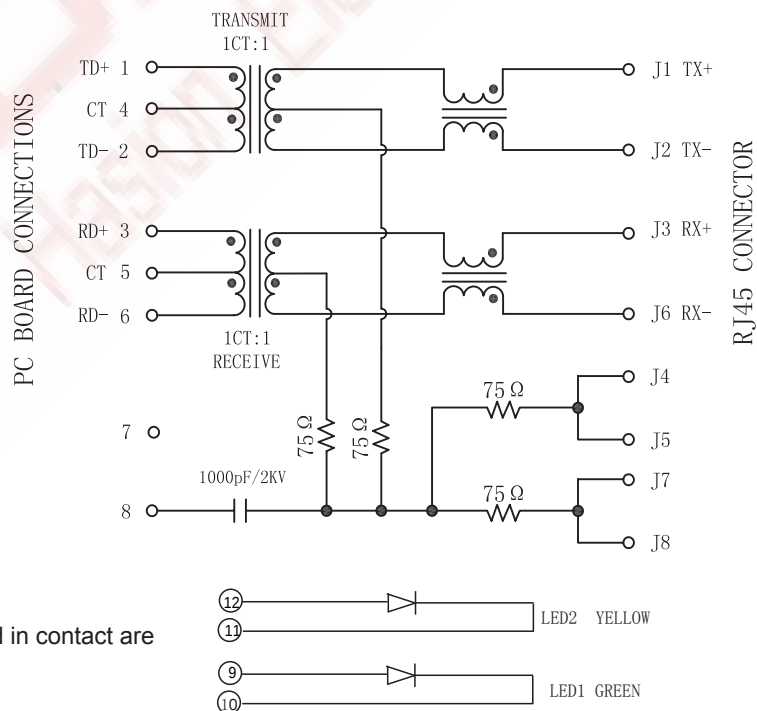

选用此款型号时，请仔细对比引脚排列和定义



浩然电子官方公众号



浩然电子官方淘宝店

TEL:028-86127089 0755-86066647

UNIT :mm

. xx +/-0.25, . xxx +/-0.13

10/100BASE
1X1 Tab-Up RJ45

成都浩然电子有限公司

PART NO:FC-180CGYYNL

www.hschip.com

REV.
E

SHEET 1 OF 1