


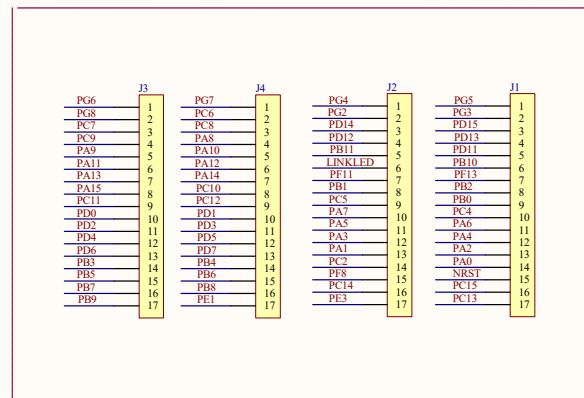

ISP时：短接P3的1、2脚，短接P4
运行时：断开P3的1、2脚，短接其2、3脚：P4不管

P5

1
2
3

Header 3

3V3

R25

10K

BOOT0

GND

P6

1
2

Header 2

BOOT1

PB2

10K

R24

GND

使用PB2引脚：断开P4

3V3A

R5 10R R6 499R R7 499R

C18 22nF

C19 16.8nF

C21 16.8nF

C23 10nF

C24 2000V 1nF

3V3

EARTH

HS6105R

TD+ 1 TD- 2 RD+ 3 RD- 4 TCT 5 RD- 6 RD- 7 NC 8 SHIELD 9 GRN+ 10 GRN- 11 YEL+ 12

13 14

EARTH

ACTLED LINKLED

R11 0 TXN R12 0 TXP R13 0 RXN R14 0 RXP

R17 499R R16 499R

EMI 0 柱大调

非EMI 可不用

GND

GND

